


Acoustic Lightings

9322293323/9322298957


Turbo lights




OUTLANDER TURBO

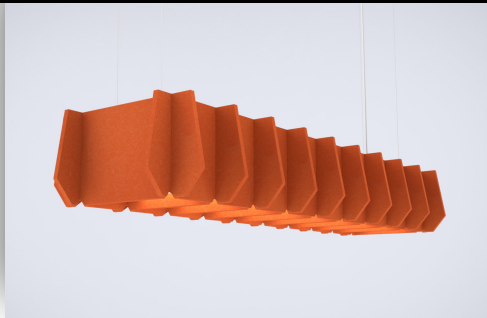

Supply and installation of outlander 8mm Ecoustic Panels for reducing and controlling Reverberated noise with a NRC of 0.50mm, Panel composition 100 % pet to be minimum 50% Recycled PET with LOW VOC and greentag Level A certification which addresses life cycle impacts such as Toxicity. Size of Panel 1210mm x 2720mm with thickness of 8mm, weight 1550gsm, Density 194kg/m3. Fire Test AS / NZS 1530.3, Acoustic NRC 0.30, - direct fix 0.40 with a 14mm air gap, 0.45 with a 24mm air gap, IOW VOC AND GREEN TAG CERTIFIED, Usage Screens wall & Ceiling Panels.

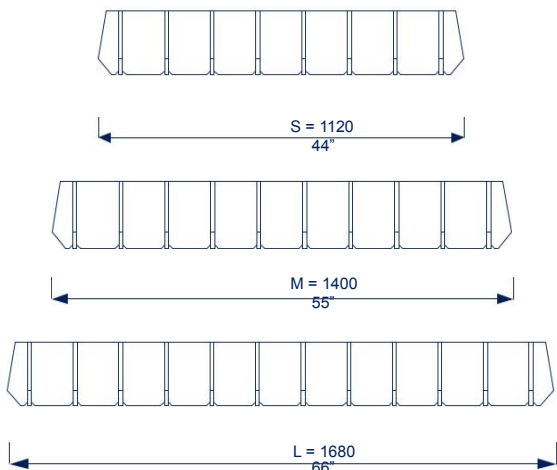

Lamp Configuration

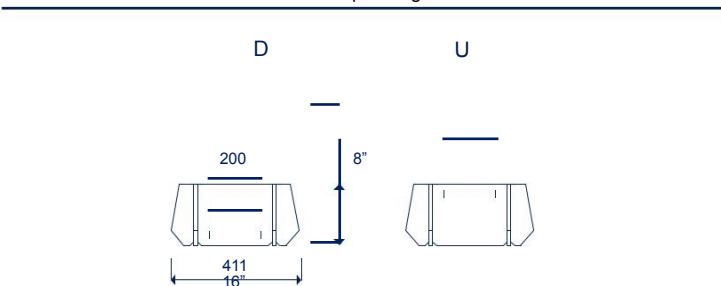


Standard Range



light blue (LB) bright blue (BB) light grey (LG) charcoal (C) green (GR)

Premium Range A

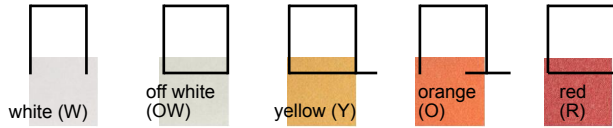

- Comes with 3 Meters of power cable
- Suitable for indoor environments
- Group 1-S fire rated
- Class D sound absorption NRC 0.40
- Minimum 65% recycled material
- IES files available

HOW TO SPECIFY

LX-MA = (Size) - (Colour) - (Distribution)


| Size | Shade Colour | Light Distribution (up/down) |
|---------------|-------------------------|------------------------------|
| S = 1120 Long | | D = Down |
| M = 1400 Long | Specify colour as below | U = Up |
| L = 1680 Long | | DU = Down and Up |

OUTLANDER

KEY FEATURES

- Available in a number of lengths
- Available as individual units or continuous run lengths
- Highly effective sound absorption
- Light source LED
- Optional upwards wash lighting
- 4 Suspension cables, height adjustable


Turbo lights

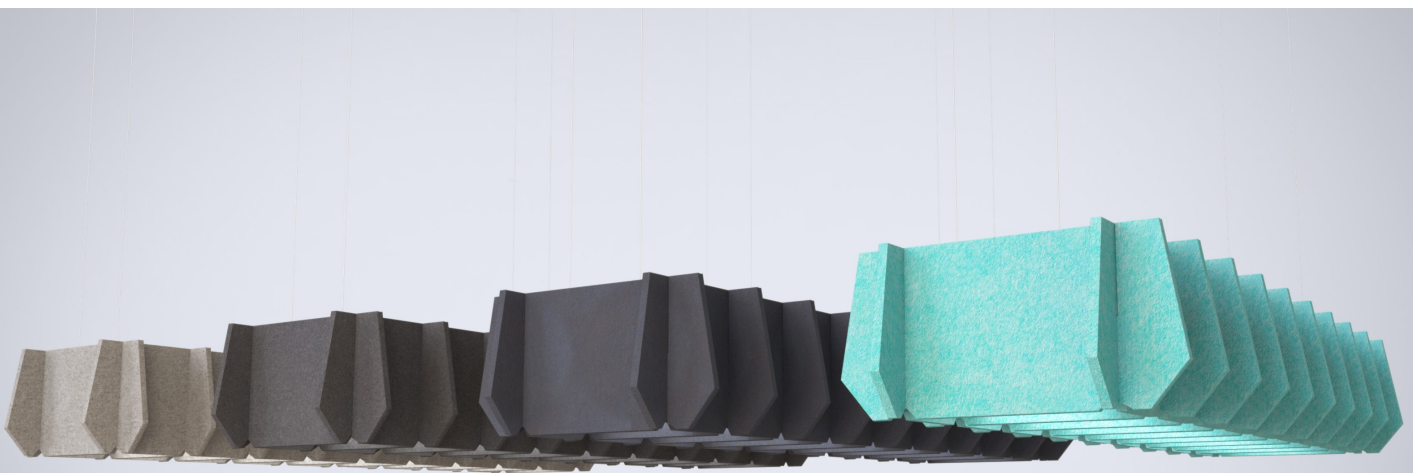

TURBO LIGHTS



GLADIATOR TURBO

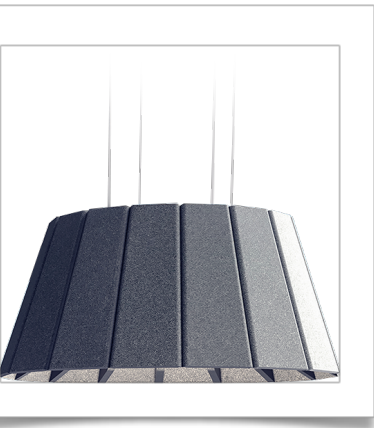

Supply and installation of INSTYLE make 8mm Ecooustic Panels for reducing and controlling Reverberated noise with a NRC of 0.50mm, Panel composition 100 % pet to be minimum 50% Recycled PET with LOW VOC and greentag Level A certification which addresses life cycle impacts such as Toxicity. Size of Panel 1210mm x 2720mm with thickness of 8mm, weight 1550gsm, Density 194kg/m3. Fire Test AS / NZS 1530.3, Acoustic NRC 0.30, - direct fix 0.40 with a 14mm air gap, 0.45 with a 24mm air gap, IOW VOC AND GREEN TAG CERTIFIED, Usage Screens wall & Ceiling Panels.

KEY FEATURES

- Available in a number of lengths
- Available as individual units or continuous run lengths
- Highly effective sound absorption
- Light source LED
- Optional upwards wash lighting
- 4 Suspension cables, height adjustable
- Comes with 3 Meters of power cable
- Suitable for indoor environments
- Group 1-S fire rated
- Class D sound absorption NRC 0.40
- Minimum 65% recycled material
- IES files available

LX-MA = (Size) - (Colour) - (Distribution)

| | | |
|---------------|-------------------------|------------------|
| | | |
| S = 1120 Long | Specify colour as below | D = Down |
| M = 1400 Long | | U = Up |
| L = 1680 Long | | DU = Down and Up |



TURBO LIGHTS

TURBO LIGHTS





GUMP TURBO

TURBO LIGHT



Supply and installation of INSTYLE make 8mm Ecoustic Panels for reducing and controlling Reverberated noise with a NRC of 0.50mm, Panel composition 100 % pet to be minimum 50% Recycled PET with LOW VOC and greentag Level A certification which addresses life cycle impacts such as Toxicity. Size of Panel 1210mm x 2720mm with thickness of 8mm, weight 1550gsm, Density 194kg/m3. Fire Test AS / NZS 1530.3, Acoustic NRC 0.30, - direct fix 0.40 with a 14mm air gap, 0.45 with a 24mm air gap, LOW VOC AND GREEN TAG CERTIFIED, Usage Screens wall & Ceiling Panels.

KEY FEATURES

- Available in a number of lengths
- Available as individual units or continuous run lengths
- Highly effective sound absorption
- Light source LED
- Optional upwards wash lighting
- 4 Suspension cables, height adjustable
- Comes with 3 Meters of power cable
- Suitable for indoor environments
- Group 1-S fire rated
- Class D sound absorption NRC 0.40
- Minimum 65% recycled material
- IES files available

LX-MA = (Size) - (Colour) - (Distribution)



S = 1120 Long

D = Down

M = 1400 Long

Specify colour as below

U = Up

L = 1680 Long

DU = Down and Up



TURBO LIGHTS

EMAIL:contact@turbolightsindia.com

TURBO LIGHTS



TURBO LIGHTS

TURBO LIGHTS



Supply and installation of INSTYLE make 8mm Ecooustic Panels for reducing and controlling Reverberated noise with a NRC of 0.50mm, Panel composition 100 % pet to be minimum 50% Recycled PET with LOW VOC and greentag Level A certification which addresses life cycle impacts such as Toxicity. Size of Panel 1210mm x 2720mm with thickness of 8mm, weight 1550gsm, Density 194kg/m3. Fire Test AS / NZS 1530.3, Acoustic NRC 0.30, - direct fix 0.40 with a 14mm air gap, 0.45 with a 24mm air gap, IOW VOC AND GREEN TAG CERTIFIED, Usage Screens wall & Ceilling Panels.

KEY FEATURES

- Available in a number of lengths
- Available as individual units or continous run lengths
- Highly effective sound absorption
- Light source LED
- Optional upwards wash lighting
- 4 Suspension cables, height adjustable
- Comes with 3 Meters of power cable
- Suitable for indoor environments

LX-MA = (Size) - (Colour) - (Distribution)



S = 1120 Long

D = Down

M = 1400 Long

Specify colour as below

U = Up

L = 1680 Long

DU = Down and Up

TURBO LIGHTS




TURBO LIGHTS



Supply and installation of INSTYLE make 8mm Ecooustic Panels for reducing and controlling Reverberated noise with a NRC of 0.50mm, Panel composition 100 % pet to be minimum 50% Recycled PET with LOW VOC and greentag Level A certification which addresses life cycle impacts such as Toxicity. Size of Panel 1210mm x 2720mm with thickness of 8mm, weight 1550gsm, Density 194kg/m3. Fire Test AS / NZS 1530.3, Acoustic NRC 0.30, - direct fix 0.40 with a 14mm air gap, 0.45 with a 24mm air gap, IOW VOC AND GREEN TAG CERTIFIED, Usage Screens wall & Ceiling Panels.

TURBO LIGHTS

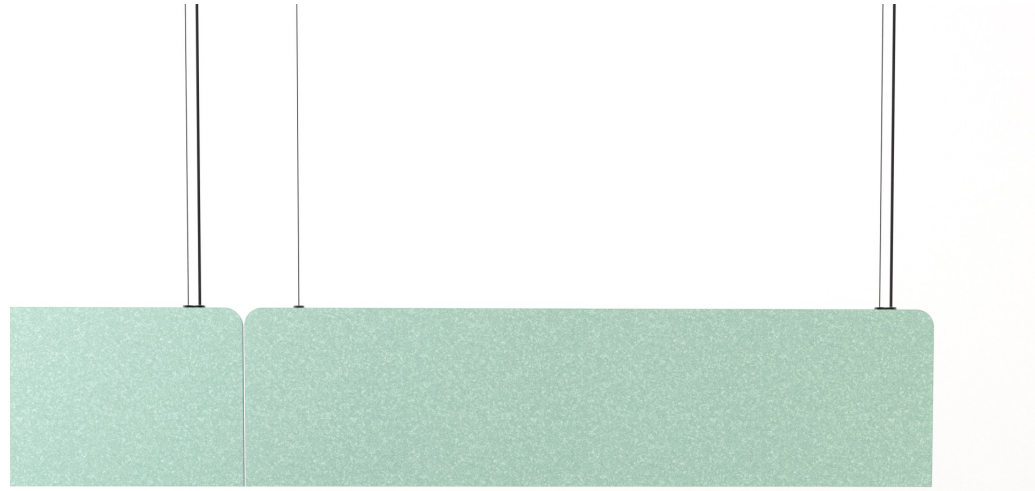

TURBO LIGHTS



TURBO LIGHTS



Supply and installation of INSTYLE make 8mm Ecooustic Panels for reducing and controlling Reverberated noise with a NRC of 0.50mm, Panel composition 100 % pet to be minimum 50% Recycled PET with LOW VOC and greentag Level A certification which addresses life cycle impacts such as Toxicity. Size of Panel 1210mm x 2720mm with thickness of 8mm, weight 1550gsm, Density 194kg/m3. Fire Test AS / NZS 1530.3, Acoustic NRC 0.30, - direct fix 0.40 with a 14mm air gap, 0.45 with a 24mm air gap, LOW VOC AND GREEN TAG CERTIFIED, Usage Screens wall & Ceilling Panels.

TURBO LIGHTS



TURBO LIGHTS



Supply and installation of INSTYLE make 8mm Ecoustic Panels for reducing and controlling Reverberated noise with a NRC of 0.50mm, Panel composition 100 % pet to be minimum 50% Recycled PET with LOW VOC and greentag Level A certification which addresses life cycle impacts such as Toxicity. Size of Panel 1210mm x 2720mm with thickness of 8mm, weight 1550gsm, Density 194kg/m³. Fire Test AS / NZS 1530.3, Acoustic NRC 0.30, - direct fix 0.40 with a 14mm air gap, 0.45 with a 24mm air gap, IOW VOC AND GREEN TAG CERTIFIED, Usage Screens wall & Ceiling Panels.

TURBO LIGHTS



TURBO LIGHTS

TURBO LIGHTS



Supply and installation of INSTYLE make 8mm Ecooustic Panels for reducing and controlling Reverberated noise with a NRC of 0.50mm, Panel composition 100 % pet to be minimum 50% Recycled PET with LOW VOC and greentag Level A certification which addresses life cycle impacts such as Toxicity. Size of Panel 1210mm x 2720mm with thickness of 8mm, weight 1550gsm, Density 194kg/m3. Fire Test AS / NZS 1530.3, Acoustic NRC 0.30, - direct fix 0.40 with a 14mm air gap, 0.45 with a 24mm air gap, LOW VOC AND GREEN TAG CERTIFIED, Usage Screens wall & Ceilling Panels.



TURBO LIGHTS





TURBO LIGHTS

TURBO LIGHT

496 KALBADEVI ROAD SHOP NO 8 ,KRISHNA NIVAS

MUMBAI-400002

EMAIL:contact@turbolightsindia.com